
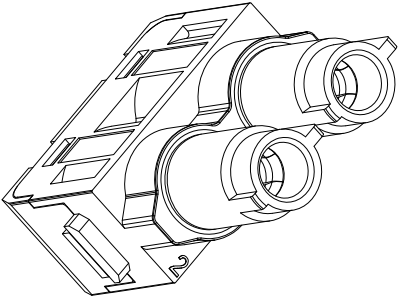

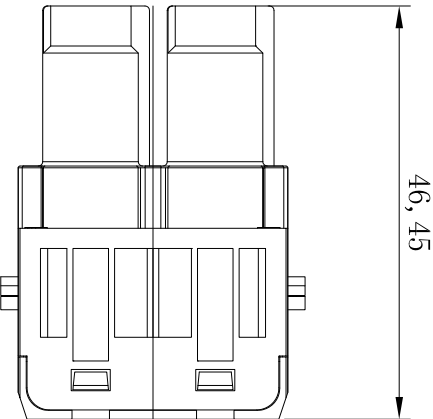


REVISIONS				
REV	ECN	DESCRIPTION	DATE	DRAFT

- 技术参数:
- 插芯:
- 插针数: 2
 - 额定电流: 70A
 - 额定电压: 1000V
 - 额定脉冲电压: 8kV
 - 污染等级: 3
 - 依据UL的额定电压: 600V
 - 绝缘电阻: $\geq 10^{10}\Omega$
 - 材料: 聚碳酸酯
 - 温度范围: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 - 依据UL94阻燃等级: V0
 - 可拔插次数: ≥ 500
- 插针:
- 接线方式: 轴向螺栓连接
 - 材料: 铜合金
 - 表面处理: 镀银
 - 接触电阻: $\leq 0.5\text{m}\Omega$
 - 线径范围: 6—16mm²
 - 剥线长度:
 - mm² 6 10 16 22
 - mm 11+1 11+1 11+1 12.5+1
 - 拧紧力矩:
 - mm² 6 10 16 22
 - Nm 2 3 4 5
 - 内六角扳手: SW 2.5

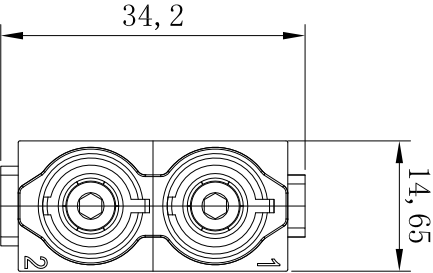

未注尺寸公差(mm)

0 ~ ≤ 20	20 ~ ≤ 50	50 ~ ≤ 80	80 ~ ≤ 120	120 ~ ≤ 150	150 ~ ≤ 200	>200
± 0.15	± 0.25	± 0.35	± 0.50	± 0.70	± 1.00	± 1.50

ZJKK

浙江昊科电气有限公司
ZHEJIANG HAOKE ELECTRICAL CO., LTD

产品代号
Part Code:

HMK70-002.1-F (6-16mm²)

图号
Drawing No:

产品料号
PART NO:

Date:

2021.04.24

REV

Weight

Qty

Drawn:

SHEET

All Dimensions in mm
Original Size DIN A 4

Scale

REV

Weight

Qty

Drawn:

SHEET

8

7

6

5

4

3

2

1